

# Control 2 to 8 PCs from one keyboard, monitor, and mouse.



## CompuSwitch

Connect any mix of PCs (PS/2 or AT), Suns, and Macs, running any operating systems. Raritan's unique keyboard and mouse emulation ensures flawless operation. Cascade CompuSwitch units to control up to 64 computers.

**CS2**            **2 Channel**

**CS4**            **4 Channel**

**CS8**            **8 Channel**

**CS4R**          **4 Channel**  
rack mount with cable support  
bracket

**CS8R**          **8 Channel**  
rack mount with cable support  
bracket

## The perfect switch for desktop or rack mount installations

The Raritan family of KVM (keyboard, video, mouse) switch products provides reliable, central control of multiple computers for the simplest to the most complex requirements. CompuSwitch is Raritan's economical, multi-platform, single-user KVM switch and is available with models for 2, 4, and 8 computers, expandable to control up to 64 computers. Its industrial strength, desktop, or rack mount chassis makes CompuSwitch an ideal choice for corporate server rooms, computer test labs, and rack mount applications. CompuSwitch will help eliminate the cost and clutter of unnecessary equipment, help reclaim space, and will improve operational productivity for a host of applications:

- ▶ Network server management
- ▶ Multi-workstation operation
- ▶ Hardware/software development and testing labs
- ▶ CTI and other OEM rack mount applications


## Premium performance and reliability

CompuSwitch is built with Raritan's unique, intelligent emulation technology, which dedicates an individual processor to each connected computer so that each computer always sees its own keyboard and mouse. This prevents keyboard and mouse lockups and ensures flawless boot up and operation of any mix of computers running any operating system.

CompuSwitch is available in 2-channel, 4-channel, and 8-channel models. Connect any mix of PCs (PS/2 or AT), Suns, and Macs, running any operating system and cascade CompuSwitch units to control up to 64 computers. Raritan's unique keyboard and mouse emulation ensures flawless operation.

Installation is as easy as connecting computers with our tangle-proof, coaxial, double-shielded cables, available in lengths of 2, 6.5, 13, 20, and 30 feet. Simply plug in your keyboard, monitor, and mouse to operate.

Select computers directly by touching the individual channel buttons on the front panel of CompuSwitch or by using hot-key commands from the keyboard. Standard features like AutoScan and AutoSkip make operation simple and convenient. To extend computers and cascade units, use Raritan's Cat5 Reach® and FiberReach® II.



CompuSwitch 4- and 8-channel models are also available in a 1U, industrial-strength, rack mount chassis with a built-in cable support bracket for a neat, professional installation.


## Features

- ▶ High reliability, low cost, easy to use
- ▶ 2-channel, 4-channel, 8-channel desktop models
- ▶ 4-channel, 8-channel models in 19" rack mount chassis (1U)
- ▶ Optional 19" rack mounting brackets for desktop models (1U)
- ▶ Optional rack mount extensions for 24" racks
- ▶ Dedicated keyboard and mouse emulator for each PC to ensure flawless boot up and operation

**When you're ready to take control, do it with Raritan's CompuSwitch.**

**Call 1-800-724-8090, or visit [www.raritan.com](http://www.raritan.com).**

- ▶ Multi-platform—mix PCs, Macs, Suns, Alphas, RS/6000s, HP9000s, SGIs, ASCII devices; also USB support
- ▶ Support of any mix of computers—Windows NT, Windows 2000, Novell 4.x, UNIX, Linux, or OpenVMS
- ▶ Easy to manage, tangle-proof, high-resolution PC cables
- ▶ VGA, SVGA, XGA high resolution video—1600x1200—support
- ▶ Hot-key commands or individual channel buttons on front panel for convenient operation
- ▶ IntelliMouse support
- ▶ SCAN for effortless monitoring
- ▶ SKIP to filter unused channels

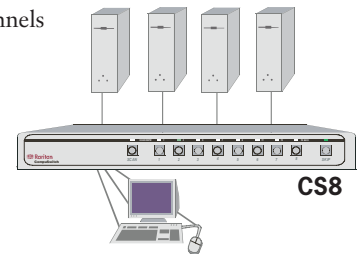

## Specifications

|                                                                                                                  |                                                                        |
|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| CS2 (2-Channel)<br>CS4 (4-Channel)                                                                               |                                                                        |
| Dimensions                                                                                                       | 10.55" (W) x 7.87" (D) x 1.75" (H)<br>268mm (W) x 200mm (D) x 44mm (H) |
| Weight                                                                                                           | 3.6 lbs (1.62 kg)                                                      |
| Power                                                                                                            | No external power required                                             |
| CS8 (8-Channel)                                                                                                  |                                                                        |
| Dimensions                                                                                                       | 15.40" (W) x 7.87" (D) x 1.75" (H)<br>390mm (W) x 200mm (D) x 44mm (H) |
| Weight                                                                                                           | 4.9 lbs (2.24 kg)                                                      |
| Power                                                                                                            | No external power required                                             |
| CS4R (4-Channel rack mount with cable support bracket)<br>CS8R (8-Channel rack mount with cable support bracket) |                                                                        |
| Dimensions                                                                                                       | 19.0" (W) x 13.12" (D) x 1.75" (H)<br>485mm (W) x 333mm (D) x 44mm (H) |
| Weight                                                                                                           | 6.2 lbs (2.8 kg)                                                       |
| Power                                                                                                            | No external power required                                             |
| Optional DC Adapter                                                                                              | 6V/1.4A                                                                |
| Standard Warranty                                                                                                | Two Years with Advanced Replacement*                                   |

Raritan Computer, Inc., founded in 1985, is the leading provider of KVM (keyboard/video/mouse) and remote management solutions for access and control of servers and other network devices. With 18 consecutive years of profitable growth and technical innovation, Raritan makes products that are used to control millions of servers at more than 35,000 network data centers, computer test labs, and multi-workstation environments around the world. From the small business to the enterprise, Raritan's complete line of compatible and scalable KVM and remote connectivity products offers IT professionals the most reliable, flexible, and secure out-of-band solutions to manage data center equipment, while improving operational productivity.

\* To qualify for advanced replacement under the standard warranty, you must register the product at [http://www.raritan.com/standard\\_warranty](http://www.raritan.com/standard_warranty)  
Raritan, Cat5 Reach, FiberReach, and CompuSwitch are registered trademarks of Raritan Computer, Inc. Sun is a registered trademark of Sun Microsystems, Inc. Mac is a registered trademark of Apple Computers, Inc.



**Hauptsitz**  
SPHINX Computer Vertriebs GmbH  
Heinrich-Lanz-Strasse 4  
69514 Laudendach  
Tel.: +49(0)6201 / 7 54 37  
Fax: +49(0)6201 / 7 42 46  
[www.sphinxcomputer.de](http://www.sphinxcomputer.de)  
[mail@sphinxcomputer.de](mailto:mail@sphinxcomputer.de)

**Niederlassung Stuttgart**  
Sphinx Connect GmbH  
Zettachring 2  
70567 Stuttgart  
Tel.: +49(0)711 / 7287-5750  
Fax: +49(0)711 / 7287-5799  
[www.sphinxconnect.de](http://www.sphinxconnect.de)  
[mail@sphinxconnect.de](mailto:mail@sphinxconnect.de)

**Niederlassung Österreich**  
S-Connect Vertriebs GmbH  
Trappelgasse 6  
A - 1040 Wien  
Tel.: +43(0)1 / 504 847-80  
Fax: +43(0)1 / 504 847-1  
[www.s-connect.at](http://www.s-connect.at)  
[mail@s-connect.at](mailto:mail@s-connect.at)

**Niederlassung Frankreich**  
SPHINX Connect France  
Parc d'activité de Bouffère  
F - 85600 Montaigu  
Tel.: +33 (0) 2 51 09 26 60  
Fax: +33 (0) 2 51 09 25 85  
[www.sphinxconnect.com](http://www.sphinxconnect.com)  
[mail@sphinxconnect.com](mailto:mail@sphinxconnect.com)

**Niederlassung England**  
S-Connect Ltd.  
Cedar House, Cedar Lane  
UK - Frimley, Surrey, GU16 7HZ  
Tel.: +44 (0) 1276 / 203-10  
Fax: +44 (0) 1276 / 203-30  
[www.s-connect.ltd.uk](http://www.s-connect.ltd.uk)  
[mail@s-connect.ltd.uk](mailto:mail@s-connect.ltd.uk)

Verkauft nur an Wiederverkäufer! Alle Preise zzgl. MwSt. und Fracht. Alle Warenzeichen im Besitz der entsprechenden Firmen. Irrtümer vorbehalten.