


Rapidport/4[®]

USB RAS

Rapidport/4 offers easy Plug-and-Play modem expansion with remote access for Windows[®] NT 4.0.

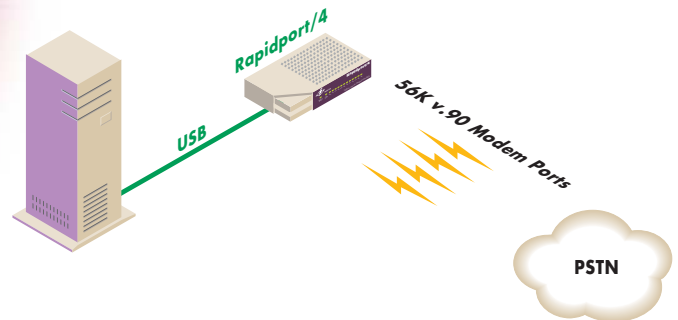

Features/Benefits

- > Add four 56K V.90 modems to a PC, server or thin client in minutes
- > Pool existing modem lines
- > Give network users access to ISP, fax and other group dial-up applications supported by Windows NT RAS
- > Broad homologation – approved for use in most countries
- > Lower total cost of ownership with user-installable, external solution – no need to open the chassis, reconfigure and reboot the system
- > On-board USB hub to stack and daisy-chain up to five Rapidport/4 units per system

Overview

Rapidport/4 offers an easy solution for remote access via Plug-and-Play USB connectivity. This external, user-installable solution plugs into the USB port of a PC, thin client or server and provides four 56K V.90 modems. EdgeUSB technology, shipping with Rapidport since 1998, adds Plug-and-Play USB compatibility to Microsoft[®] Windows NT and Windows NT Embedded system users – an industry first. The Rapidport/4 gives network users access to Internet Service Providers (ISP), fax, and other group dial-up applications supported by Windows NT RAS.

Rapidport/4 is a scalable solution – its onboard USB port enables additional units to be stacked and daisy-chained as modem requirements increase. The downstream port may be used to connect and power any 500mA USB peripheral device, including Edgeport[®] USB-to-serial converters for instant I/O expansion. Its feature-rich design, extensive operating system support and reliable performance make Rapidport/4 ideal for mission-critical enterprise applications.

Inside Out Networks, a Digi International company, is the leader in enterprise USB connectivity. Digi International, the leader in Connectware, makes device networking easy by developing products and technologies that are cost-effective and easy to use. With over 20 million ports shipped worldwide, Digi has been offering the highest levels of performance, flexibility, and quality since 1985.



Connectware[™]



www.ionetworks.com

Making
DEVICE NETWORKING
easy[™]

Features/Specifications

FEATURES

- Four 56K modems with RJ-11 connectors
- Modem standards
 - Data 56K V.90 flex and enhanced V.34
 - Error correction: V.42
 - Data compression: MNP® Class 5; V.42bis
 - Fax: V.17, Group 3, Class 1 and 2
- USB 1.0 and 1.1 compatible; backwards compatibility for 2.0
- Plug-and-Play
- On board USB hub (type A downstream connector)
 - Stack and daisy-chain up to five Rapidport/4 units
 - Connect Edgeport USB-to-serial converter for serial device connectivity
- Front panel LEDs display modem and hub status
- No additional IRQ or memory address requirements
- Broad homologation
- Includes one-meter USB cable and power supply

REGULATORY APPROVALS

- FCC Part 15, Class B
- CE
- EN55022 Class B
- EN50082-1
- EN60950
- UL 1950
- CSA 2.2 No. 950

DIMENSIONS

- Length: 4.35 in (11.05 cm)
- Width: 7.2 in (18.29 cm)
- Height: 1.03 in (2.61 cm)
- Weight: 11.0 oz (311.84 g)

OPERATING SYSTEMS

- Microsoft Windows XP, XP Embedded
- Microsoft Windows NT 4.0, NT Embedded
- Microsoft Windows CE
- Microsoft Windows 2000, Me
- Microsoft Windows 98, SE
- Microsoft Windows 95
- Linux

ENVIRONMENTAL

- Ambient temperature: 0° to 40° C (32° to 104° F)
- Relative humidity: 0% to 95% (non-condensing)

POWER REQUIREMENTS

- Ships with plug-mounted 120/230 VAC 60/50Hz at 5VDC @ 3Amps max

MODEL PART NUMBERS

Model	North America	International
Rapidport/4 (USB to 4 56K V.90 modems; RJ-11)	301-1012-04	301-2012-04
Rapidport/4 Dual Unit (2 Rapidport/4 units)	301-1012-08	301-2012-08
Rapidport Accessories		
Small Shelf Mount Bracket (mounts Rapidport/4 to wall or shelf)	301-9003-01	301-9003-01
Rack Mount Kit (19" shelf holds two units)	301-9001-01	301-9001-01
1-Meter USB Cable (A to B USB cable, 3.3 ft)	301-9000-01	301-9000-01
2-Meter USB Cable (A to B USB cable, 6.6 ft)	301-9000-07	301-9000-07
3-Meter USB Cable (A to B USB cable, 9.8 ft)	301-9000-06	301-9000-06
4-Meter USB Cable (A to B USB cable, 13 ft)	301-9000-10	301-9000-10
5-Meter USB Cable (A to B USB cable, 16.4 ft)	301-9000-02	301-9000-02
USB Repeater/Extender Cable (A to A extender, 16.4 ft)	301-9002-01	301-9002-01
USB 1.1 Upgrade Kit (PCI to USB 1.1 card)	301-1101-01	301-1101-01

DIGI SERVICE AND SUPPORT

You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. <http://support.digi.com>

Digi International

11001 Bren Road E.
 Minnetonka, MN 55343 USA
 PH: 877-912-3444
 952-912-3444
 FX: 952-912-4952
 Email: info@digi.com
www.digi.com

Digi International GmbH

Joseph-von-Fraunhofer Str. 23
 D-44227 Dortmund
 Germany
 PH: +49-231-9747-0
 FX: +49-231-9747-111
www.digi.de

Digi International (HK) Limited

Suite 1703-05, 17/F.
 K Wah Centre
 191 Java Road
 North Point, Hong Kong
 PH: +852-2833-1008
 FX: +852-2572-9989
www.digi.cn

Inside Out Networks

7004 Bee Caves Road
 Building 3, Suite 200
 Austin, TX 78746 USA
 PH: 512-306-0600
 FX: 512-306-0694
 Email: info@ionetworks.com
www.ionetworks.com



Connectware™

© 2003 Digi International Inc.

Digi, Digi International, the Digi logo, the Digi Connectware logo, Inside Out Networks, the Inside Out Networks logo, Edgeport, and Rapidport/4 are either trademarks or registered trademarks of Digi International, Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

91001225
 A1/1203